

Standard Grounding Kit for 1/4 in and 3/8 in Cable, Equivalent to Commscope 242948




Application	Grounding
Product Code	See table below
Type	Standard
Cable Size	1/4 in 3/8 in Elliptical waveguide 240 and 380
Cable Type	Corrugated Braided Elliptical waveguide
Ground Wire	6 AWG - 7 stranded
Ground Strap	Copper Tinned copper
Lug Attachment	Factory pre-attached
Lug Type	Tin plated copper
Mounting Hardware	Stainless steel 304
Weatherproofing	Butyl rubber tape 60 mm x 600 mm PVC tape 50 mm x 6 m
Operating Temperature	-40 °C to +85 °C
Package	Kit of 1


Product Code	Strap	Lead Length	Lug Type	Bolt Size
GKZ14-060-M8	Copper	600 mm	1 hole Ø8 mm	M8
GKZ14-060-38	Copper	600 mm	1 hole Ø10 mm	3/8"
GKZT14-060-M8	Tinned Copper	600 mm	1 hole Ø8 mm	M8
GKZT14-060-38	Tinned Copper	600 mm	1 hole Ø10 mm	3/8"

Installation Instructions

Please remove approx 2.5" of jacket from coaxial cable.

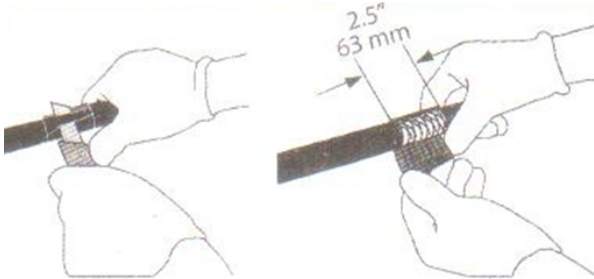

Install the grounding strap to the outer conductor of cable. And then use cable ties to fix tightly.

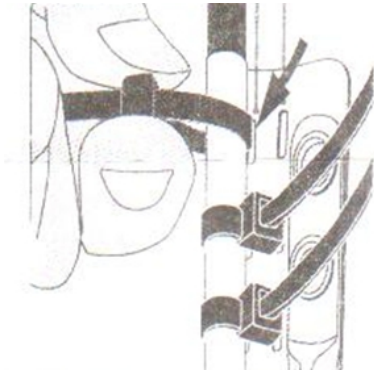

Cut ties from head smoothly without leaving any burrs.



Use butyl rubber tape and electrical tape to wrap the cable and grounding kit tightly.

